

Figure 1 is a perspective view of a motorcycle with a seat assembly. The seat assembly includes a seat cushion (21) and a seat backrest (22). The seat backrest is pivotally mounted to the seat cushion via a hinge mechanism (23, 24, 25, 26, 27, 28, 29). The seat backrest is shown in a reclined position. The motorcycle frame (WR) is also visible.

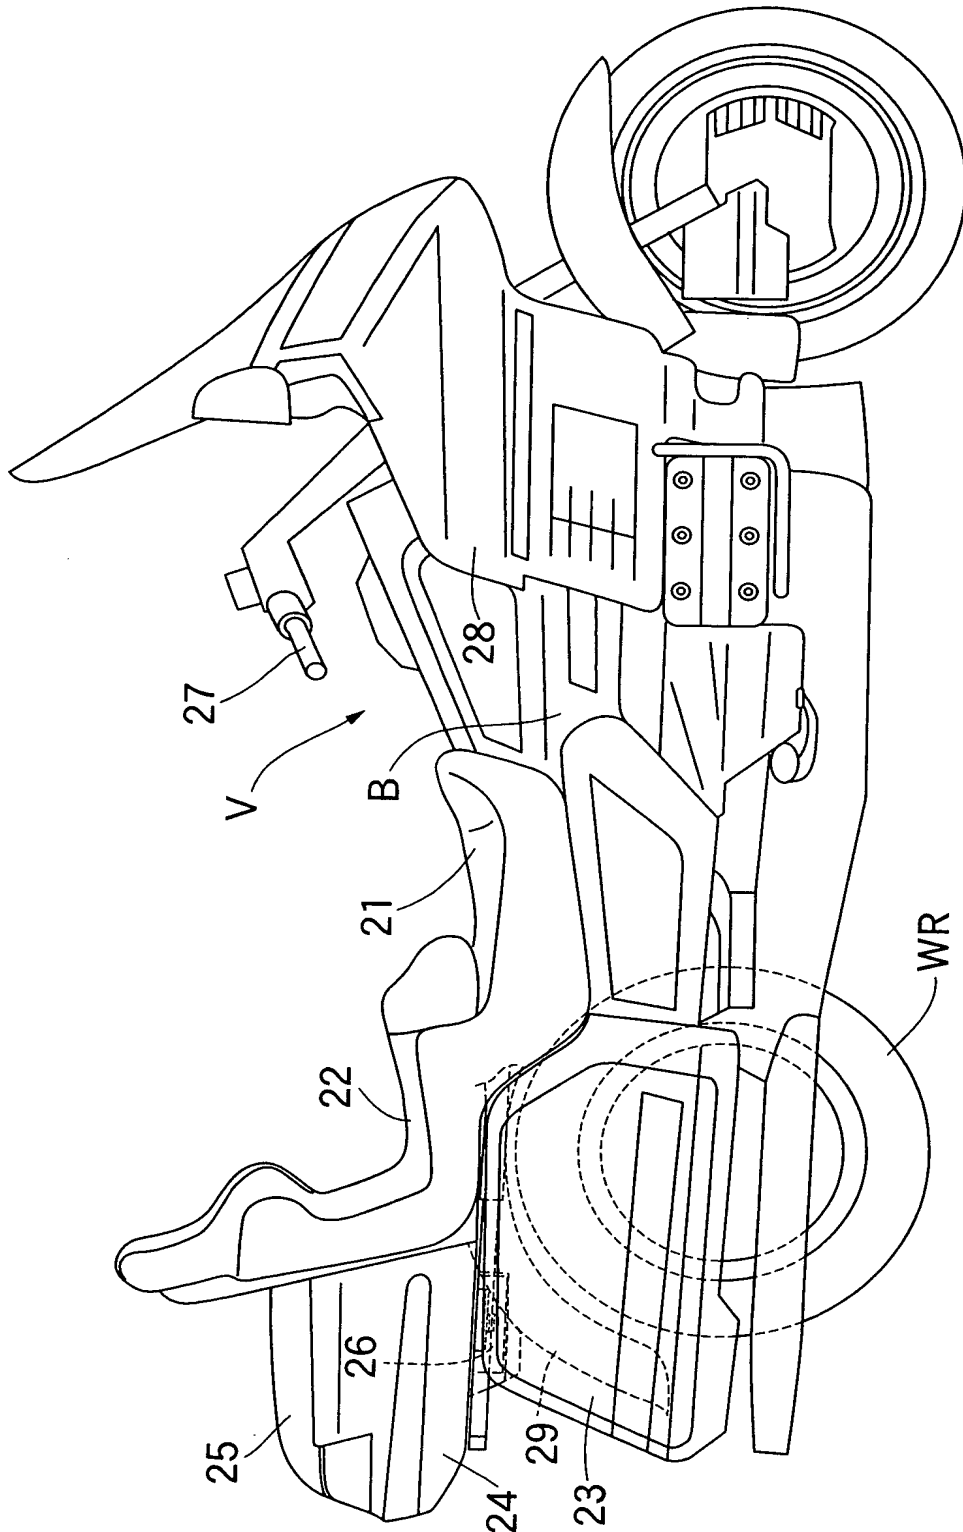


FIG.2

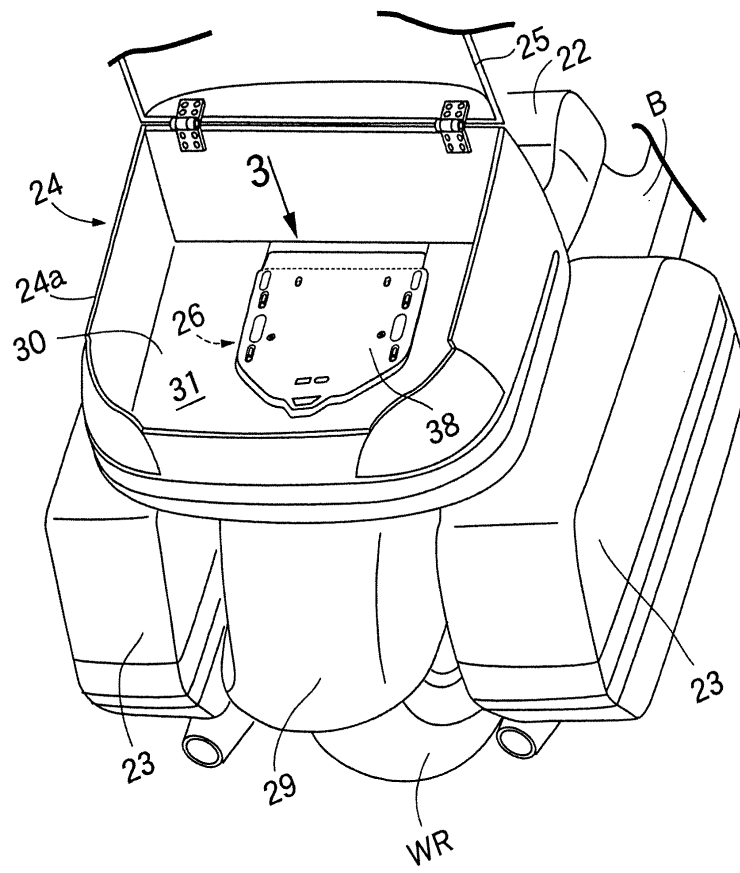


FIG.3

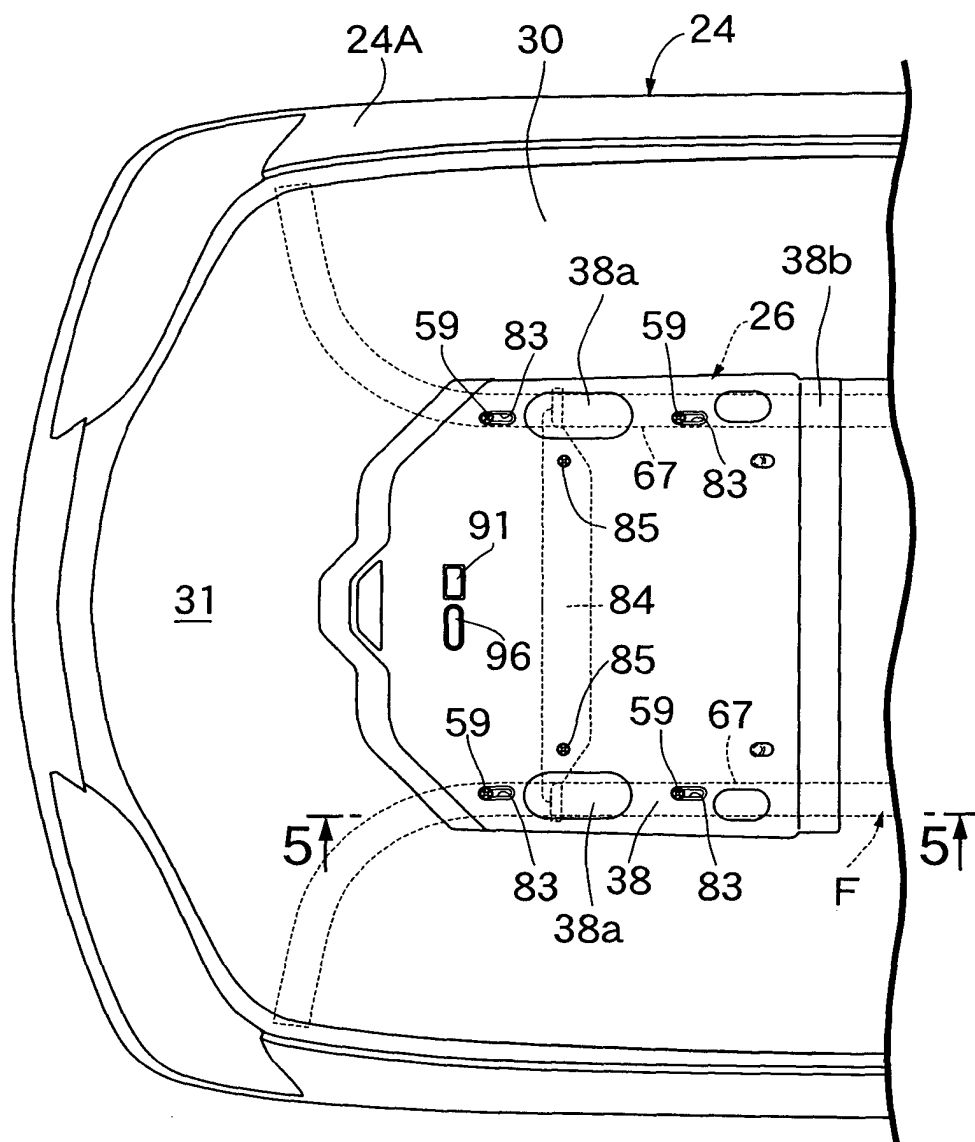


FIG.4

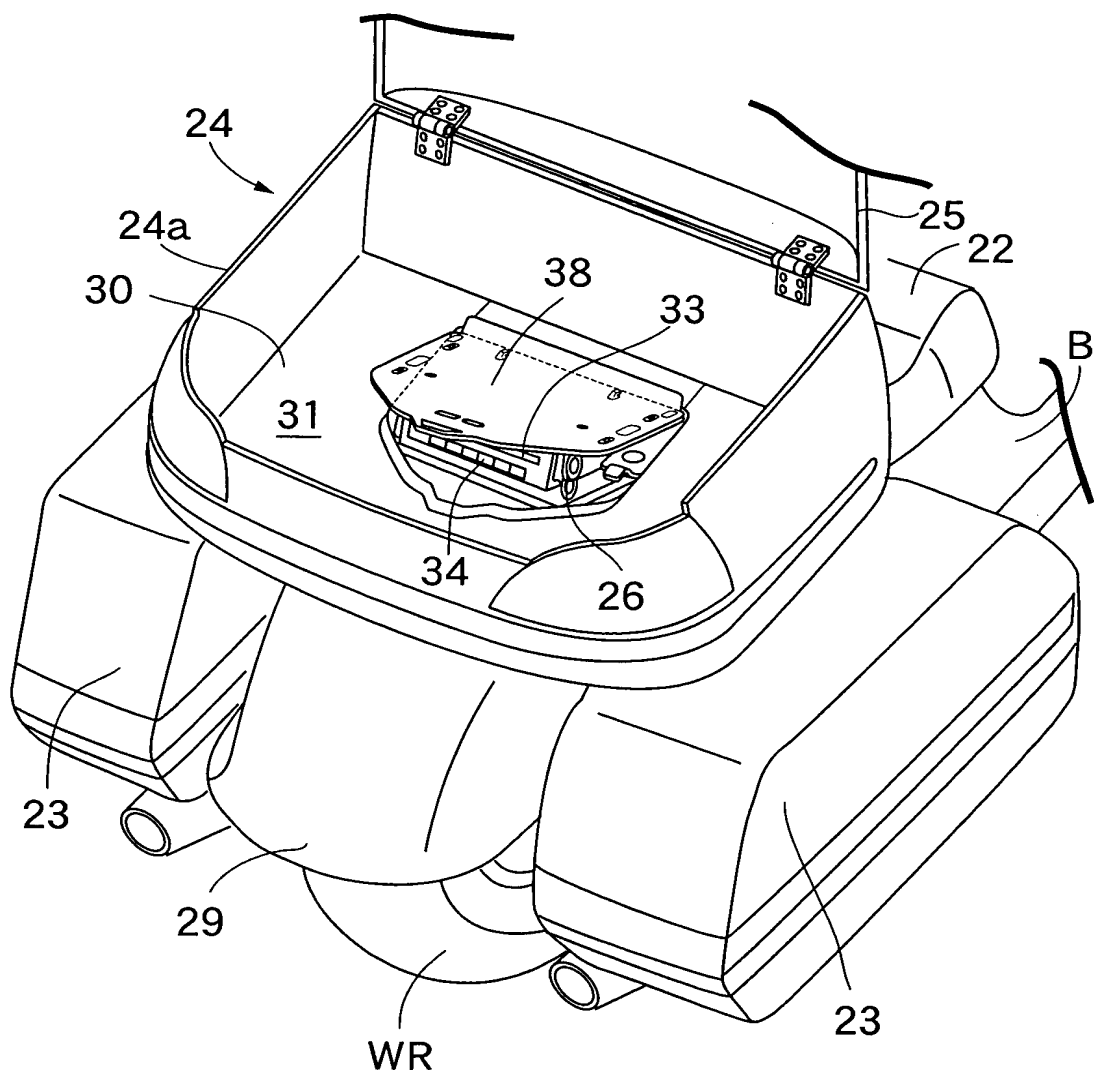


FIG.5

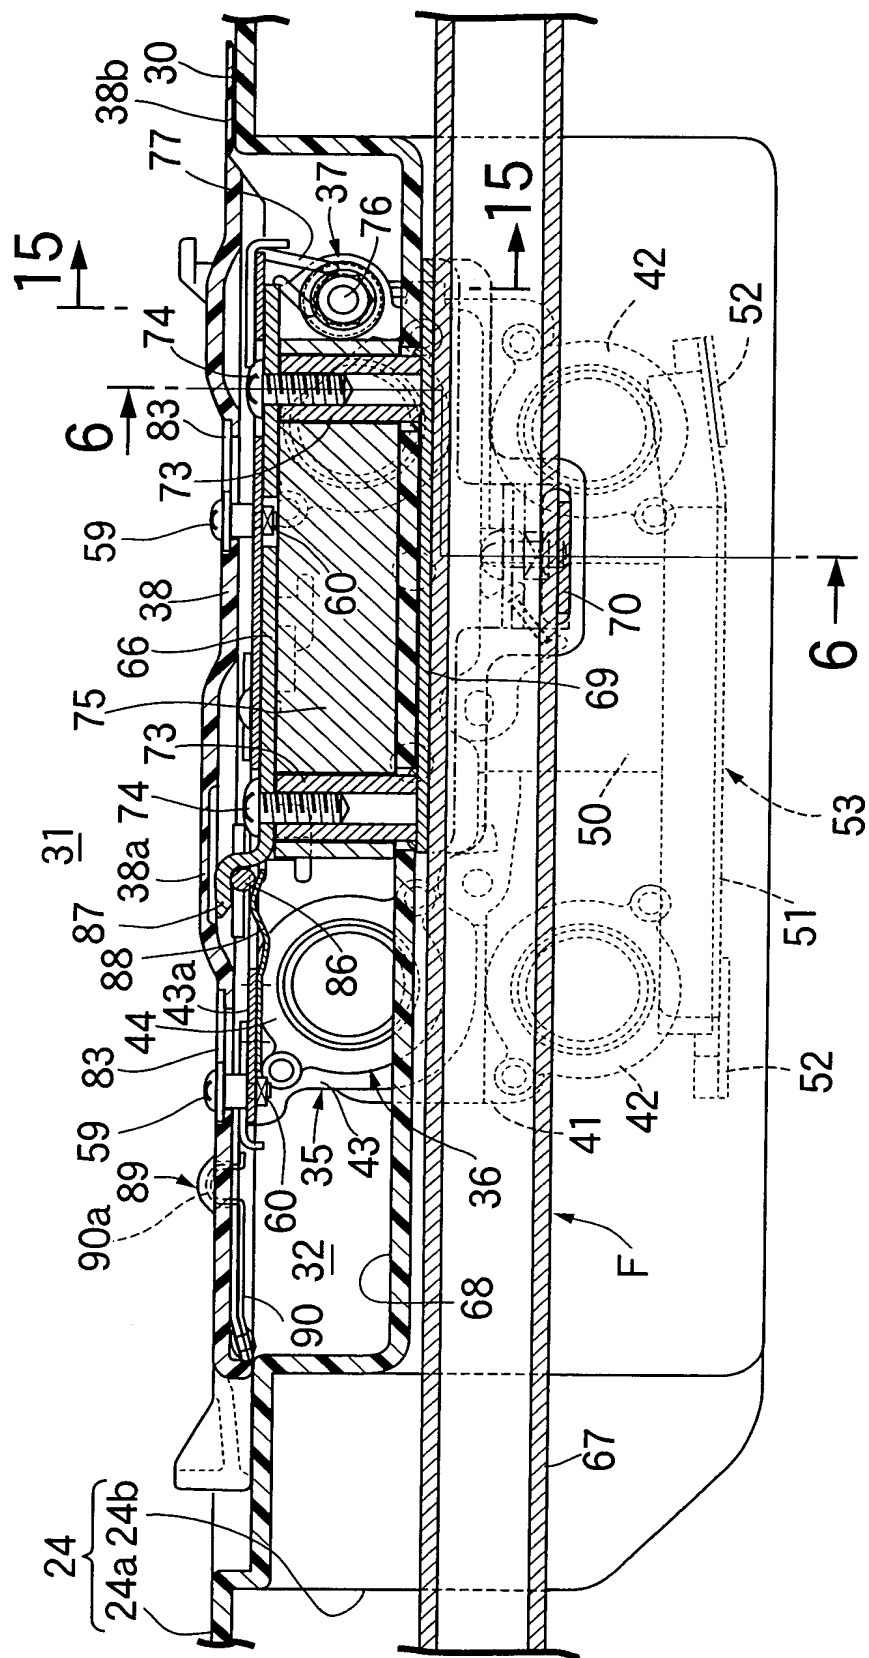


FIG.6

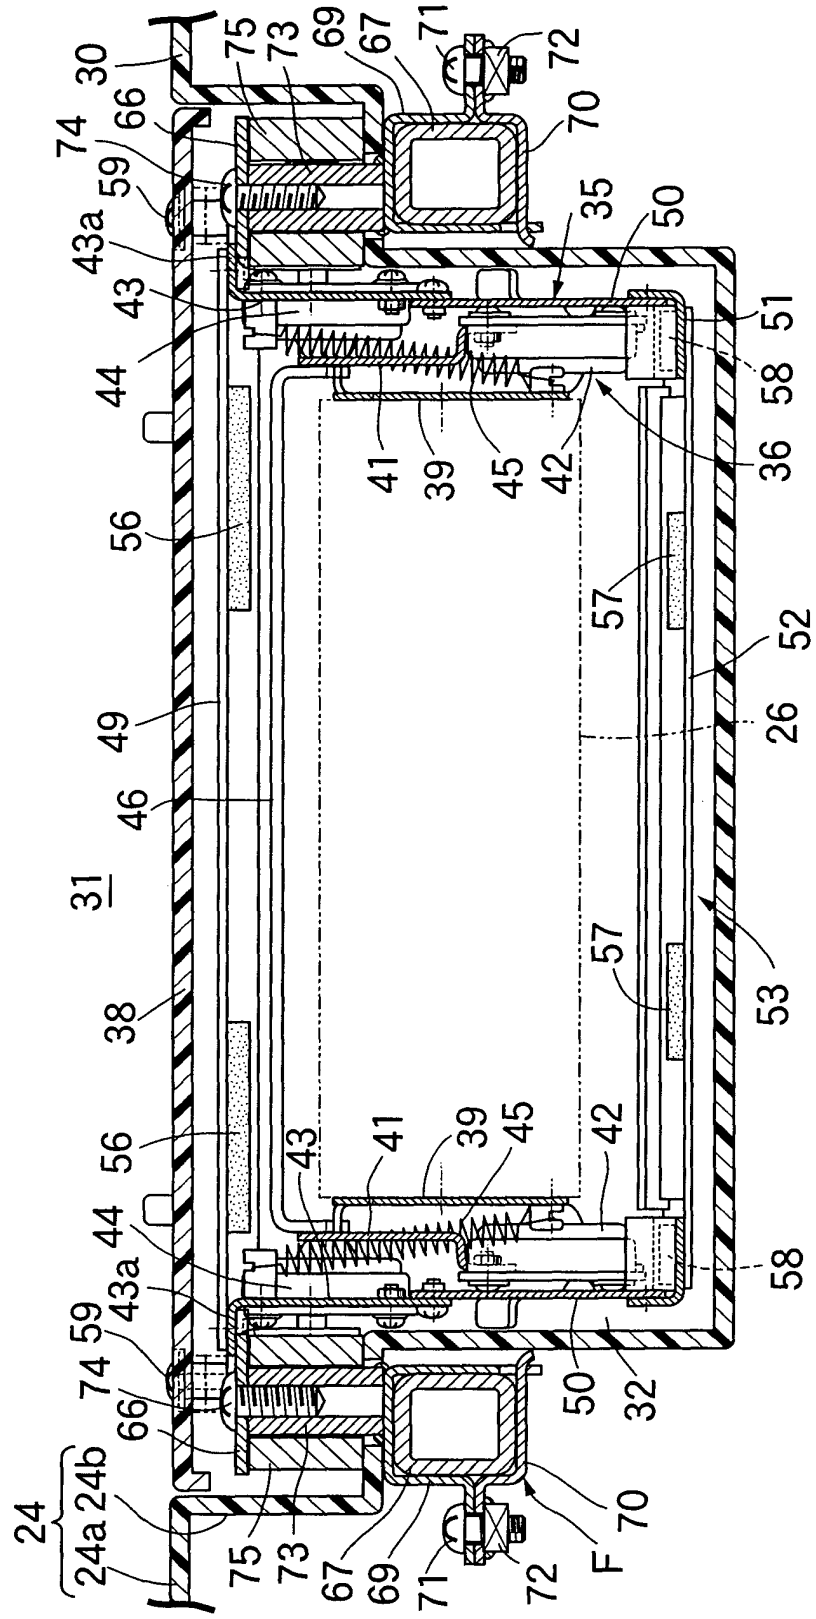


FIG.7

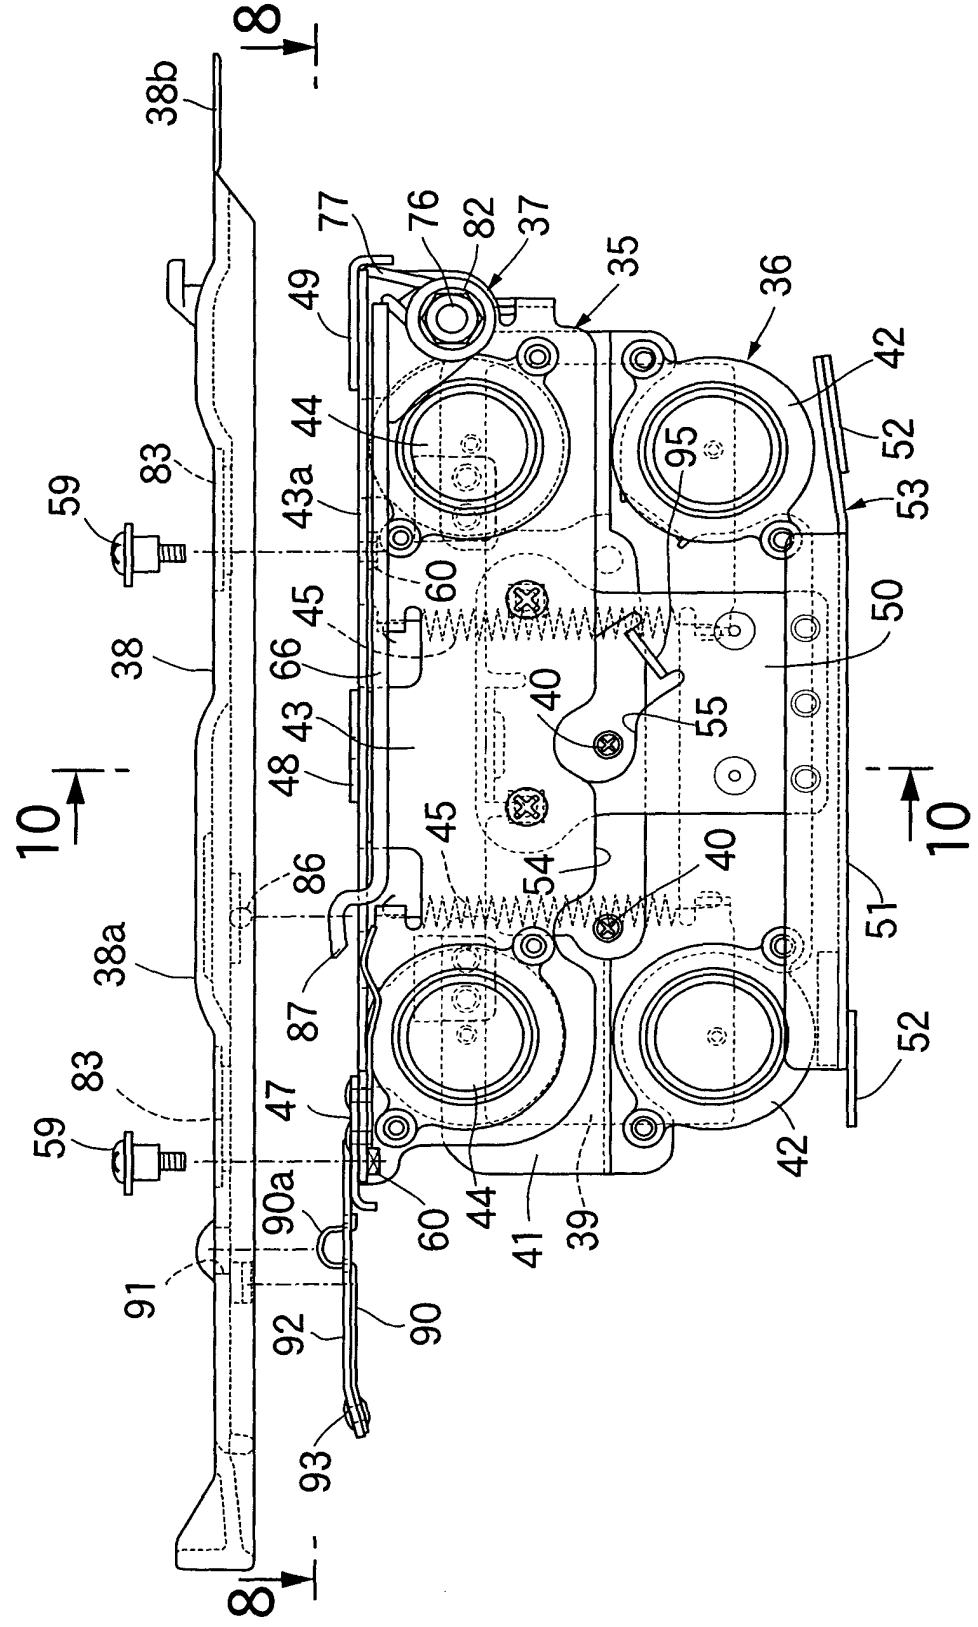


FIG.8

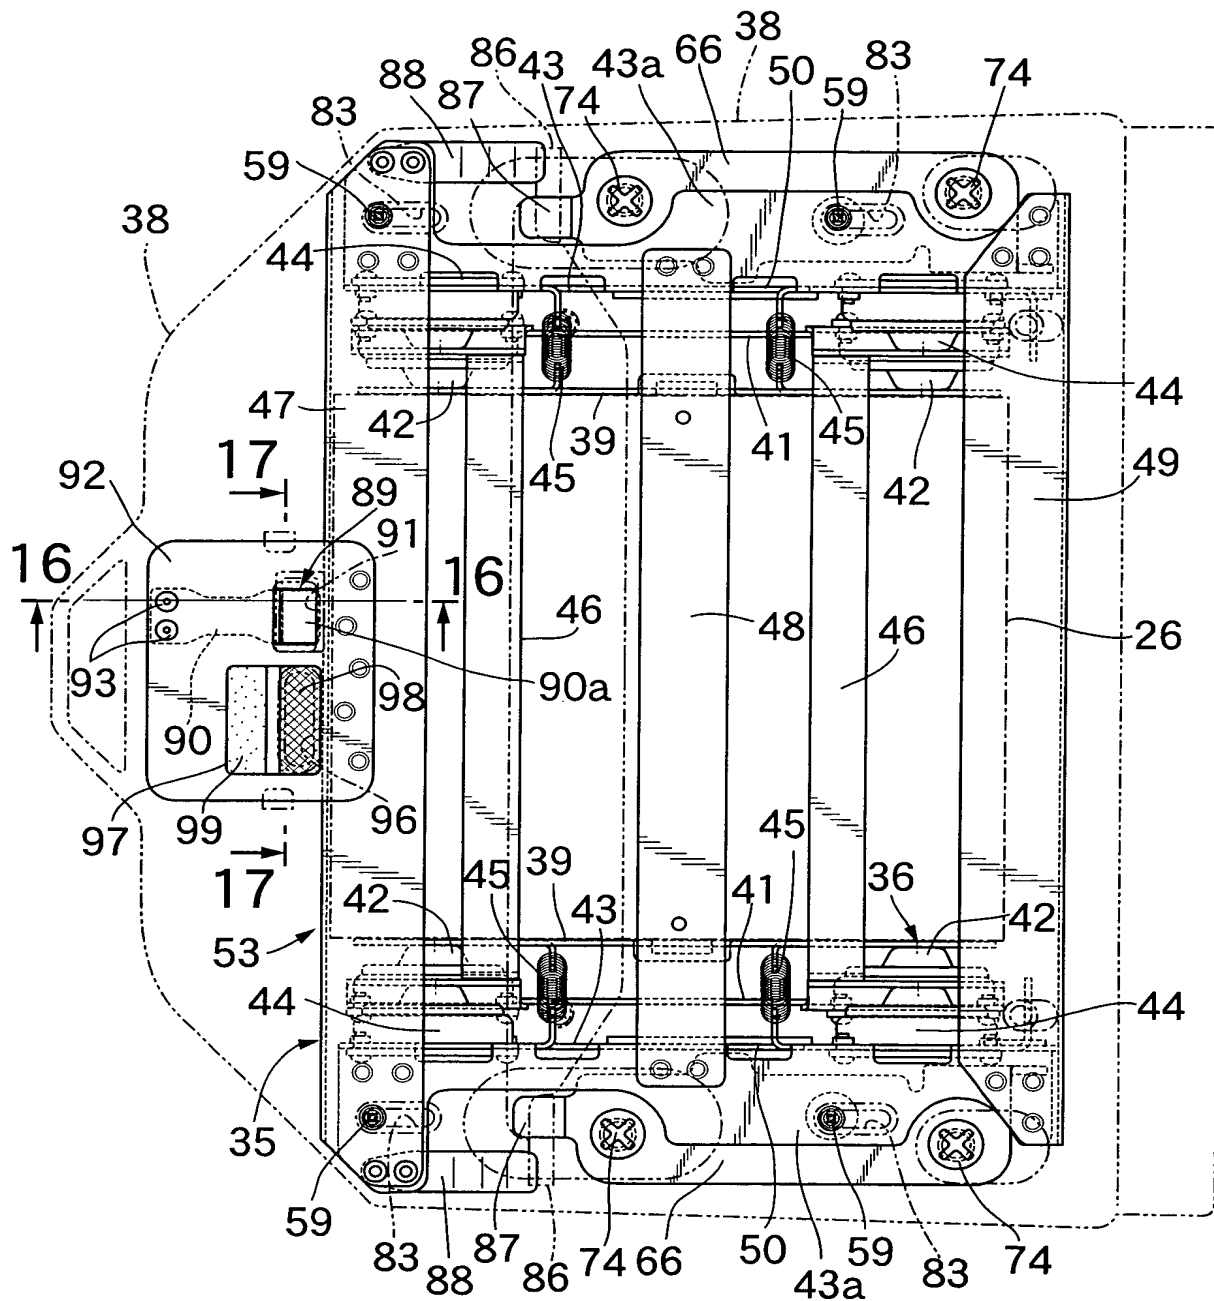


FIG. 9

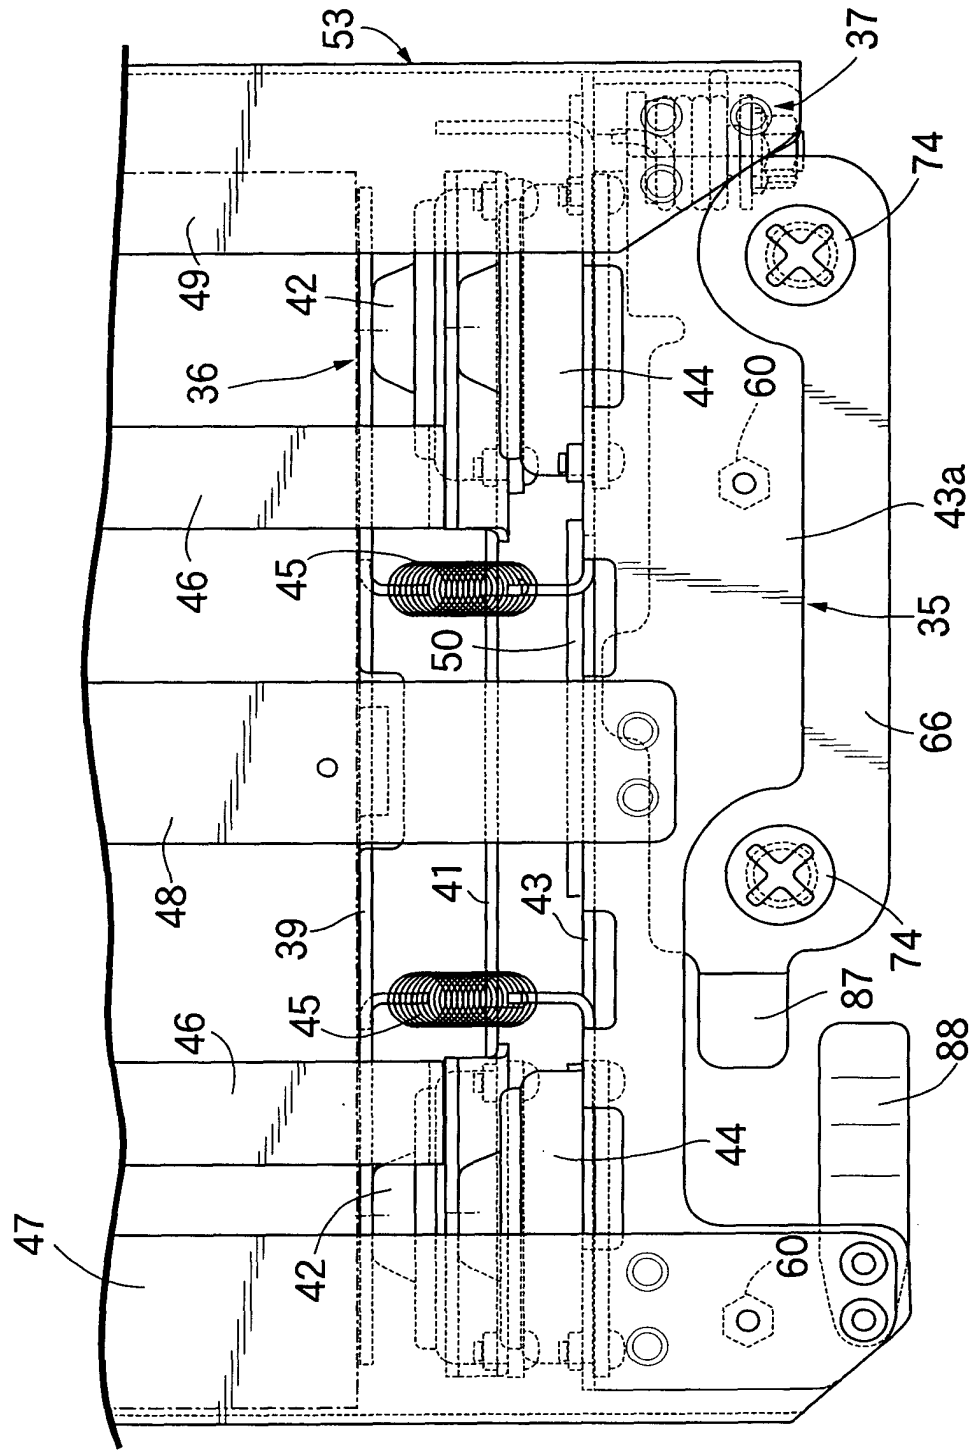


FIG.10

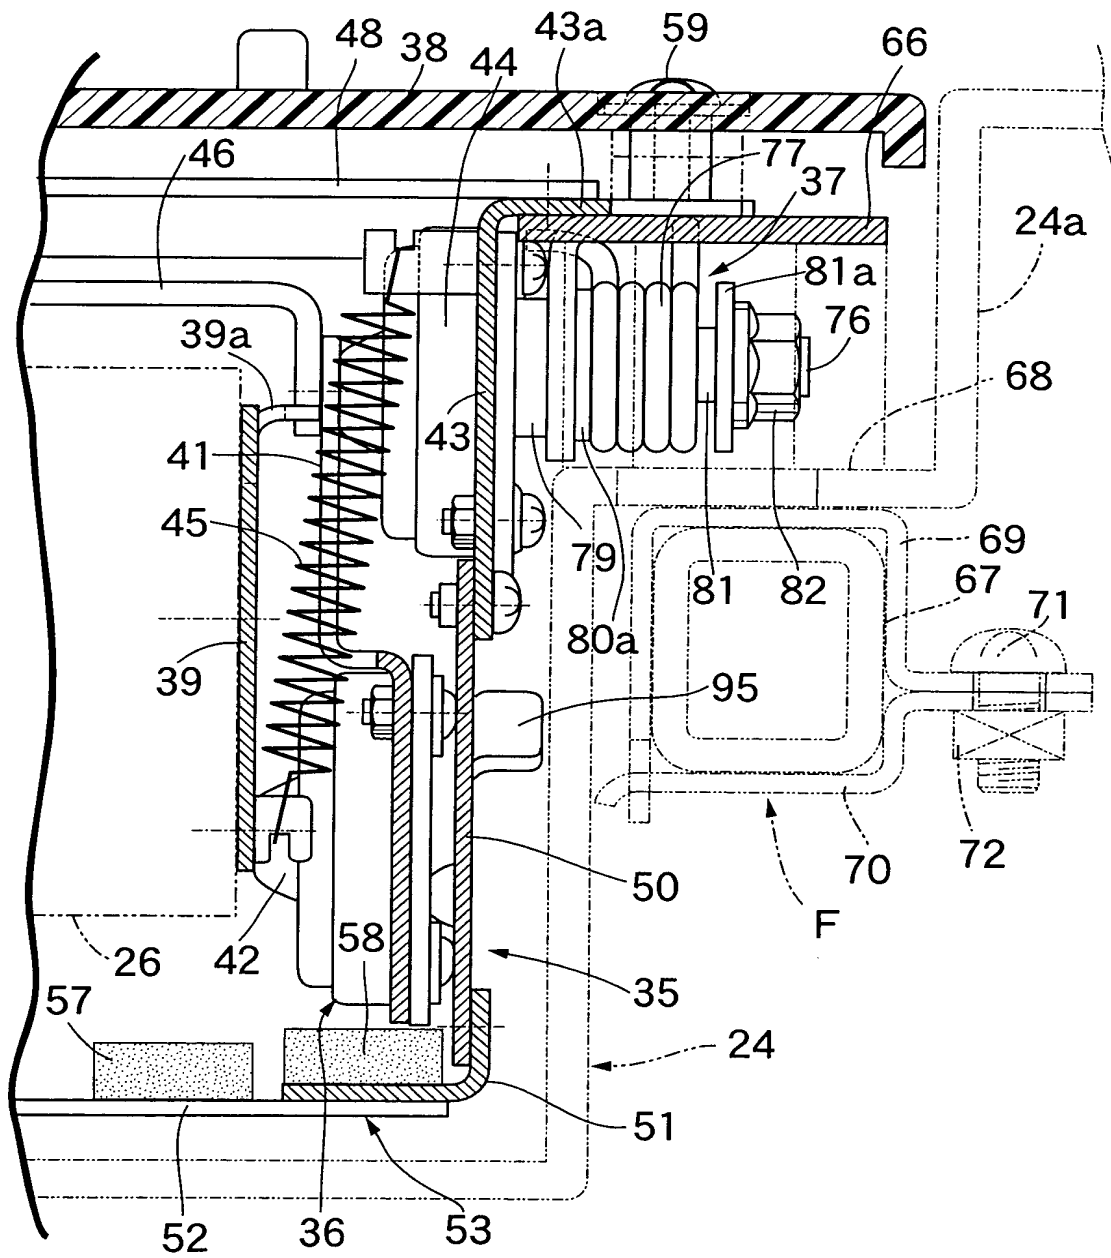


FIG.11

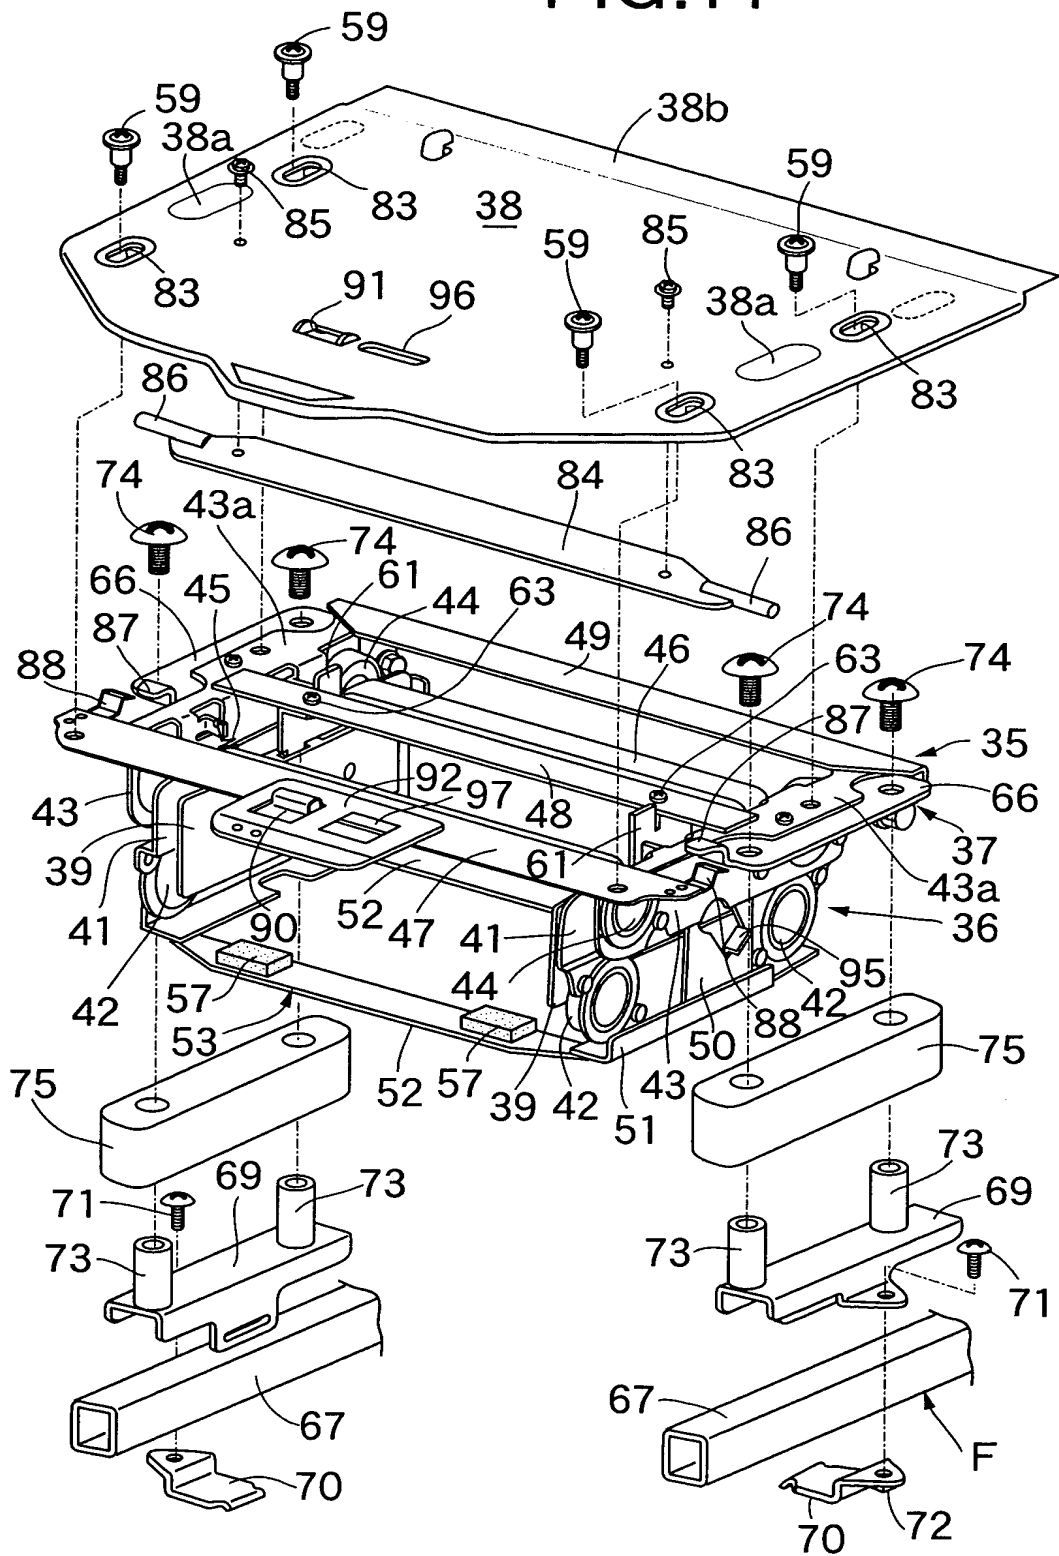


FIG.12

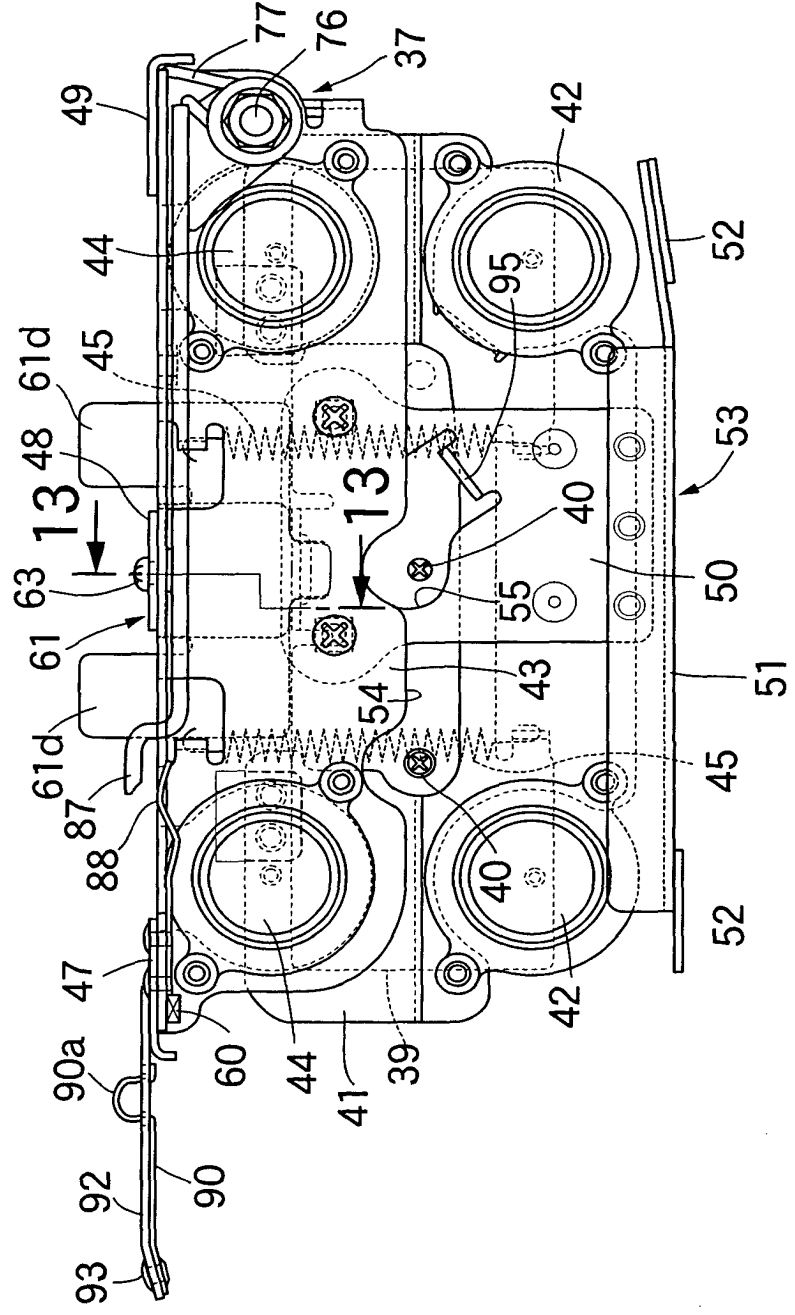


FIG.13

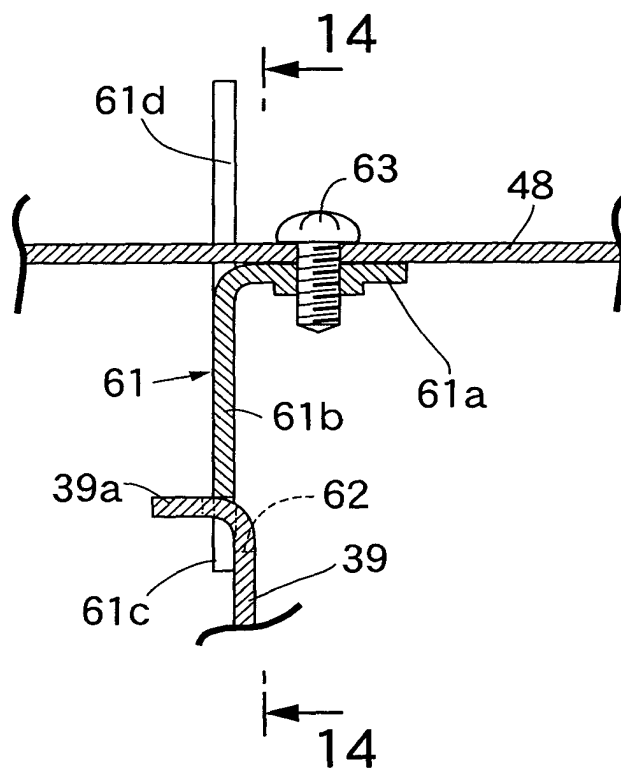


FIG.14

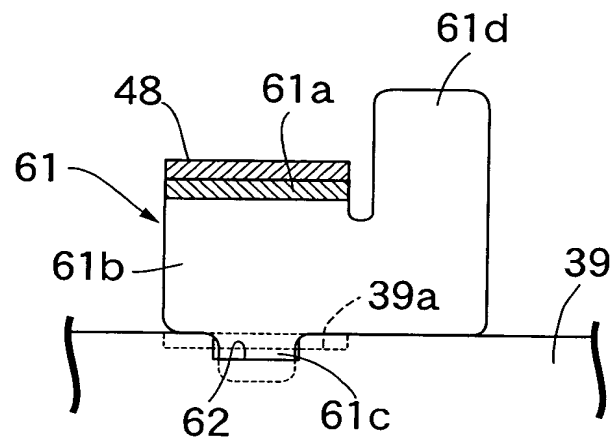


FIG.15

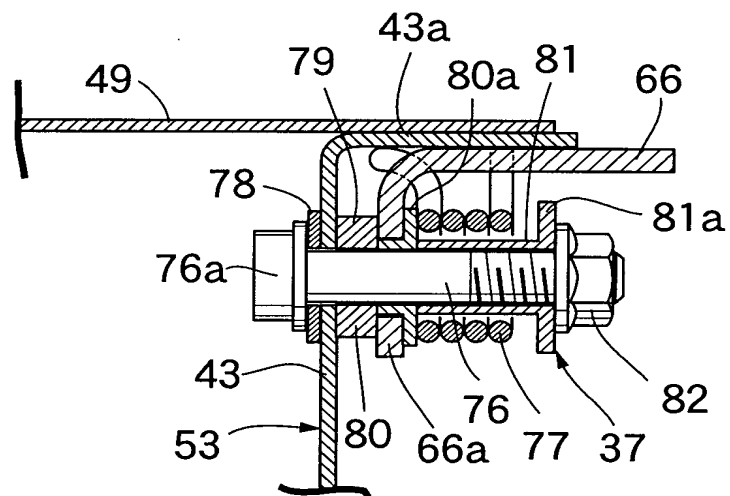


FIG.16

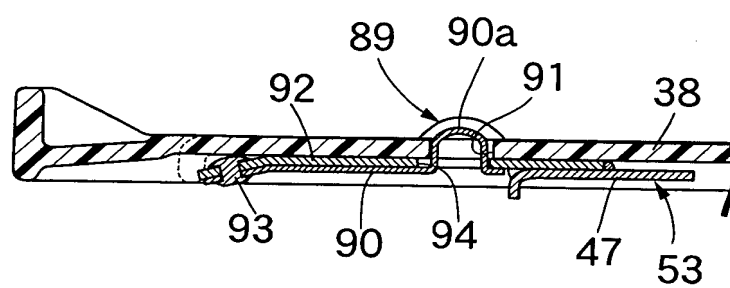


FIG.17

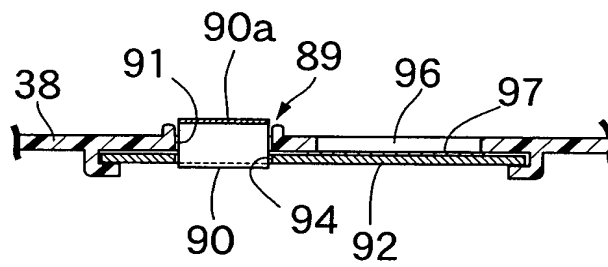


FIG.18

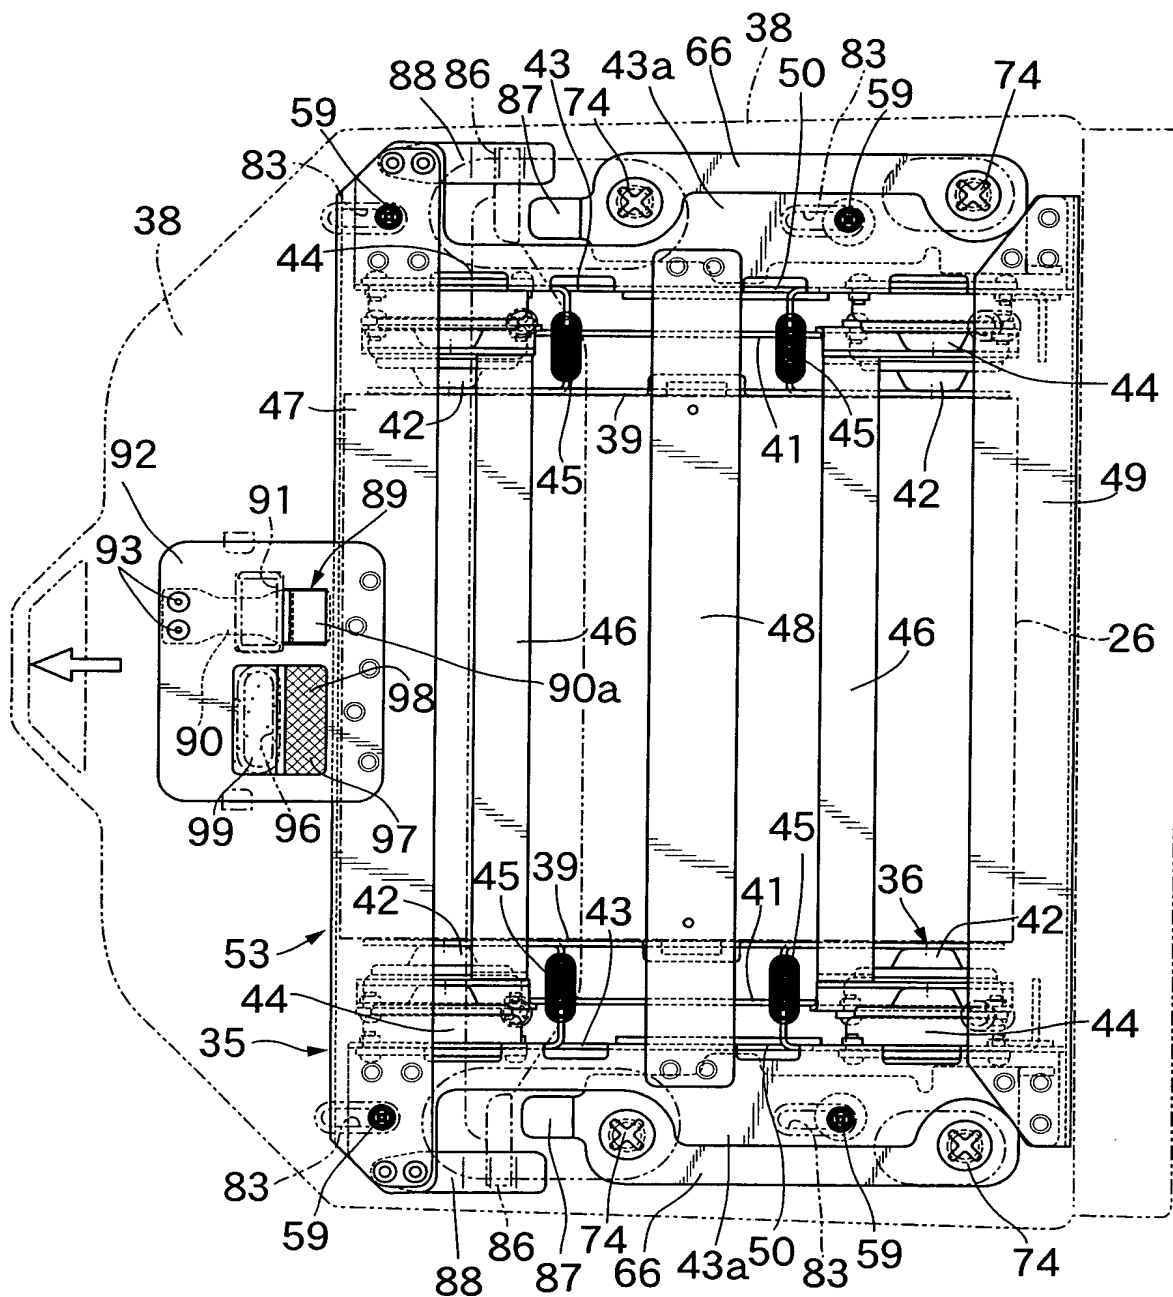
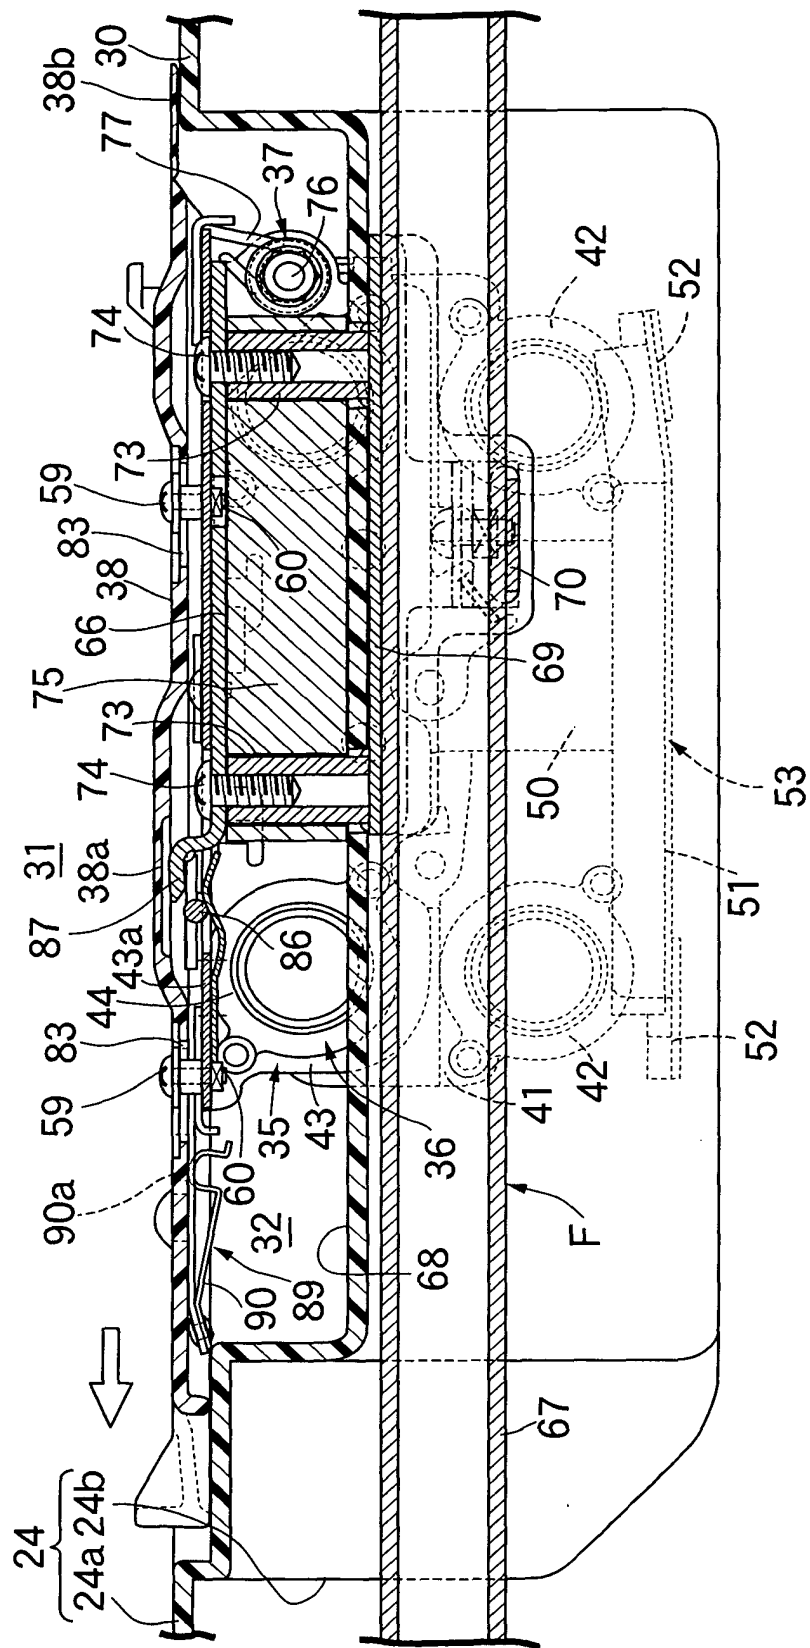


FIG.19



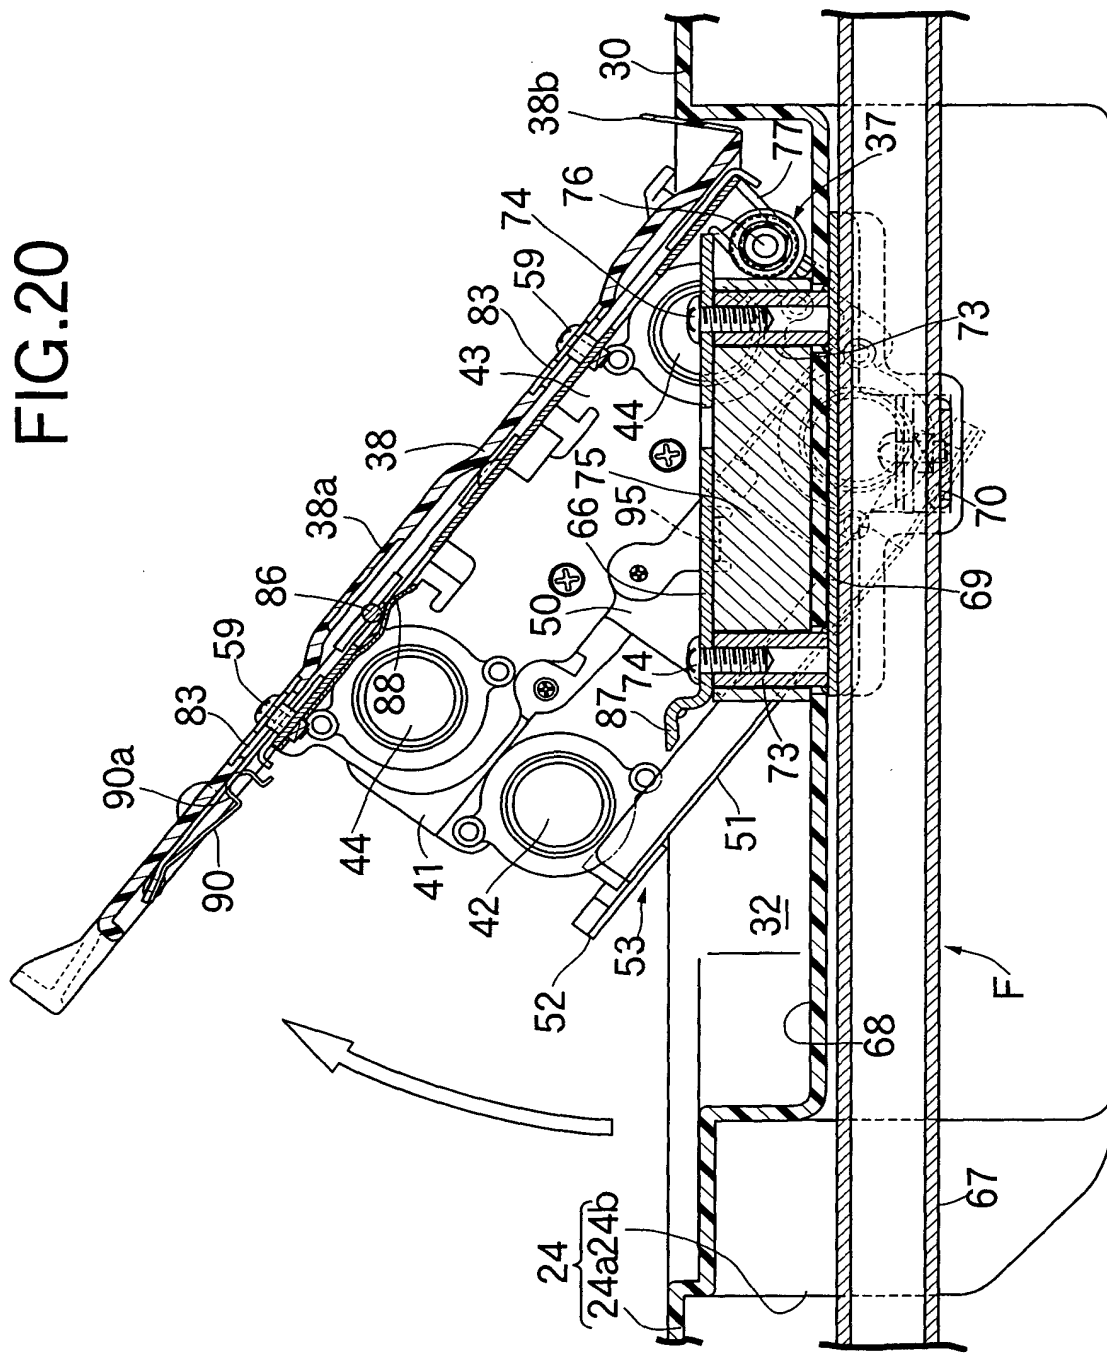


FIG. 20